
BULBS REMOVAL/INSTRUMENT/HORN

BULBS REMOVAL -----	19- 1
INSTRUMENT (ON ROAD ONLY) -----	19- 4
HORN (ON ROAD ONLY)-----	19- 4


BULBS REMOVAL**HEADLIGHT**

Remove the front fender. (See page 2-5)

Disconnect the headlight wire coupler.

Remove the rubber boot from the bulb socket.


Relax the lock clip to remove the bulb and replace with a new one.

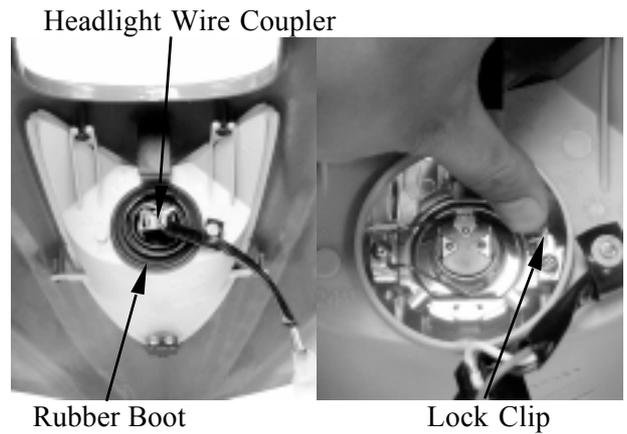

Install the bulb, aligning the bulb socket groove with the bulb tab and set the lock clip.

Install the rubber boot.


Install the front fender in the reverse order of removal.

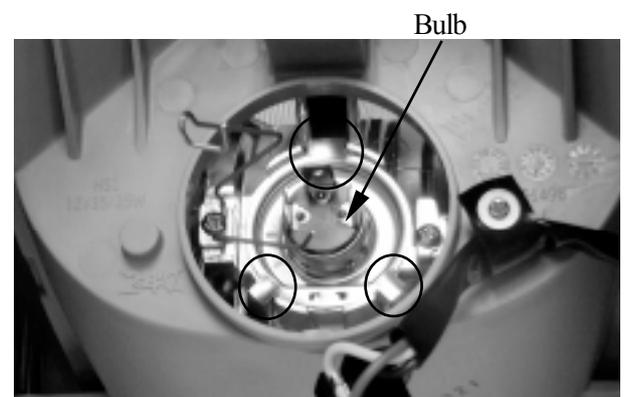**TAIL/BRAKE LIGHT**

Remove the bulb socket by turning it counterclockwise.

Remove the bulb.

Install the bulb in the reverse order of removal.

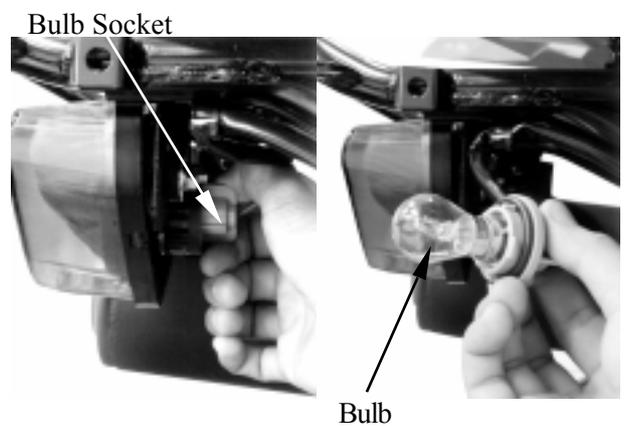

19. BULBS REMOVAL/INSTRUMENT/HORN **Mongoose/KXR 250**


INDICATOR LIGHT

Remove the handlebar cover. (See page 2-4)

Remove the bulb sockets by pulling them out.

Remove the bulb.

Install the bulb in the reverse order of removal.

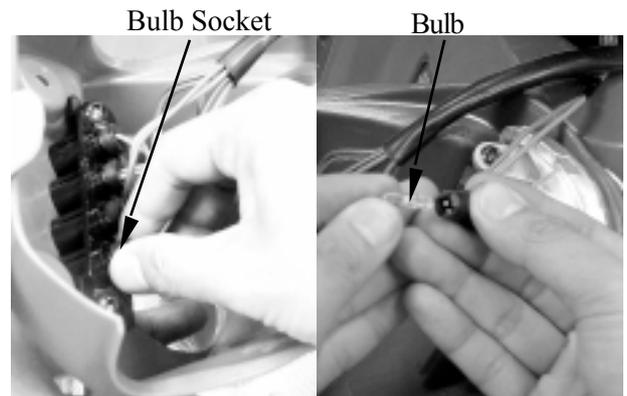


POSITION LIGHT (ON ROAD ONLY)

Remove the handlebar cover. (See page 2-4)

Remove the bulb socket by pulling it out.

Remove the bulb.


Install the bulb in the reverse order of removal.

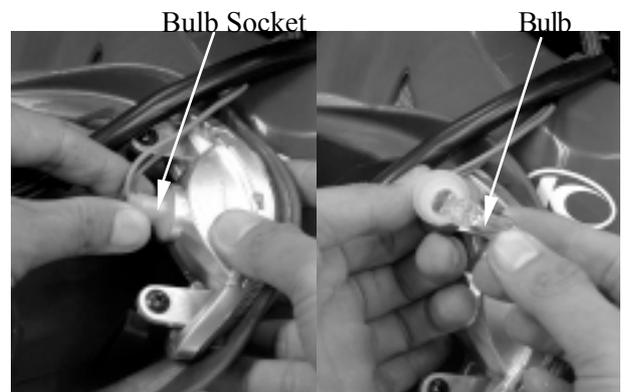


FRONT TURN SIGNAL LIGHT (ON ROAD ONLY)

Remove the turn signal light lens by a standard screwdriver.

Pull the bulb socket out from the signal light case and remove bulb.

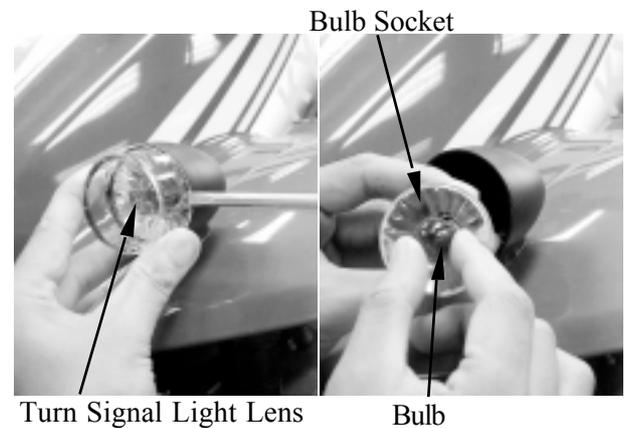

Install the bulb, aligning the bulb socket groove with the bulb tab.

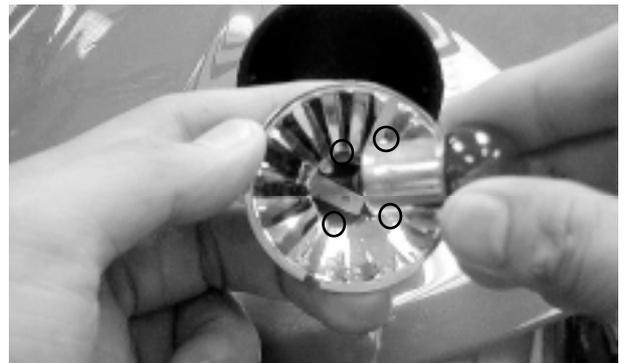


19. BULBS REMOVAL/INSTRUMENT/HORN **Mongoose/KXR 250**

Install the bulb socket, aligning the bulb socket groove with the turn signal case tab.
Install the turn signal lens, aligning the turn signal lens groove with the turn signal case tab.



REAR TURN SIGNAL LIGHT (ON ROAD ONLY)

Remove the screw and remove the turn signal light lens.
Pull the bulb socket outside from the signal light case and remove bulb.

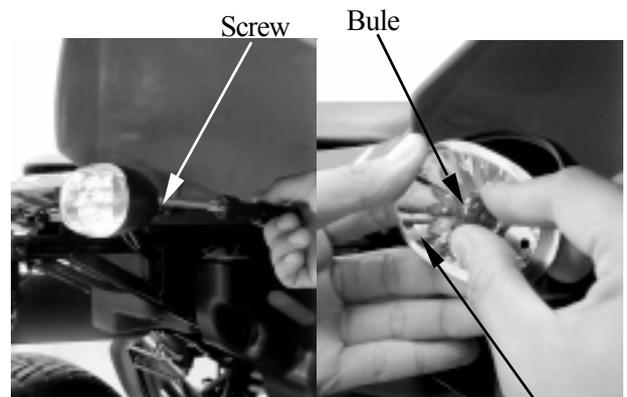

Install the bulb, aligning the bulb socket groove with the bulb tab.


Install the bulb in the reverse order of removal.



19. BULBS REMOVAL/INSTRUMENT/HORN Mongoose/KXR 250


INSTRUMENT (ON ROAD) REMOVAL

Remove the handlebar cover. (See page 2-4)
 Disconnect the meter wire coupler and speedometer cable.
 Remove the two nuts and then remove the instrument.

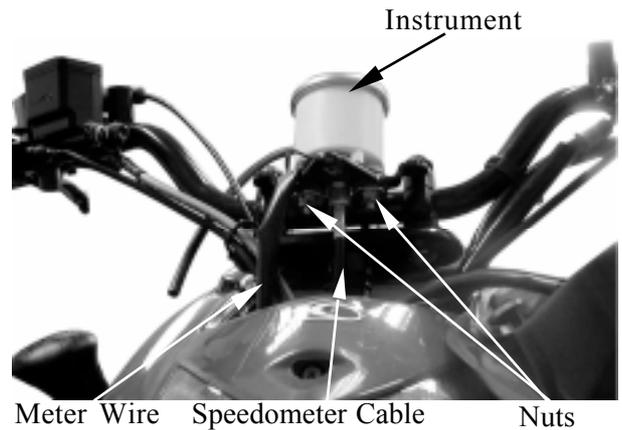

Pull the bulb socket out and then remove the instrument bulb.

Install the instrument in the reverse order of removal.

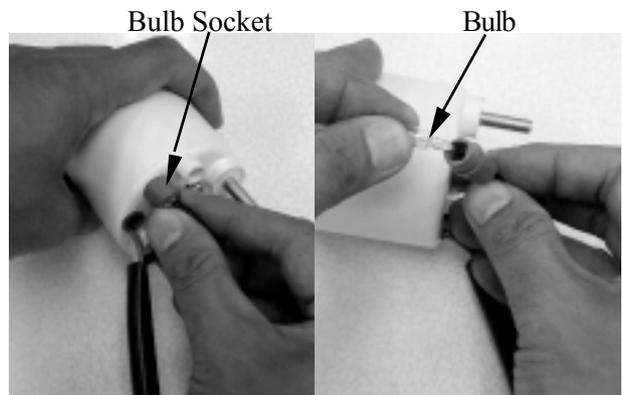

HORN (ON ROAD)

REMOVAL
 Disconnect the horn wire leads.
 Remove the bolt and remove horn.

INSTALLATION

The installation sequence is the reverse of removal.

